

FRÄSKOPF AC7

für Spindeln mit Ø 190

C-ACHSE:


Housing with mounting flange in GGG50 cast iron.
Axis bearing, grease lubricated (axial/radial) cylindrical roller bearing.

C-AXIS ROTATION ANGLE (I) (max.)	↻	+/-360°
C-AXIS ROTATION SPEED (max. S1)		300°/s
C-AXIS ACCELERATION (max.)		1.200°/s*s
C-AXIS NOMINAL TORQUE	N/m	610
C-AXIS PEAK TORQUE	N/m	960
C-AXIS HOLD UP TORQUE	N/m	404
C-AXIS CLAMPING TORQUE	N/m	3.000
C-AXIS MEASURING SYSTEM ACCURACY		+/-3,3“
C-AXIS MEASURING SYSTEM LINE COUNT		16.384
C-AXIS DATA INTERFACE	Vss	1
C-AXIS CLAMPING TYPE		clamped by hydraulic, unclamped by spring

A-ACHSE:

Housing in cast iron.
Axis bearing, grease lubricated cross/ angular roller bearing.

A-AXIS ROTATION ANGLE (max.)	↻	+/-110°
A-AXIS ROTATION SPEED (max. S1)		300°/s
A-AXIS ACCELERATION (max.)		1.200°/s*s
A-AXIS NOMINAL TORQUE	N/m	610
A-AXIS PEAK TORQUE	N/m	960
A-AXIS HOLD UP TORQUE	N/m	404
A-AXIS CLAMPING TORQUE	N/m	3.000
A-AXIS MEASURING SYSTEM ACCURACY		+/-3,3“
A-AXIS MEASURING SYSTEM LINE COUNT		16.384“
A-AXIS DATA INTERFACE	Vss	1
A-AXIS CLAMPING TYPE		clamped by hydraulic, unclamped by spring

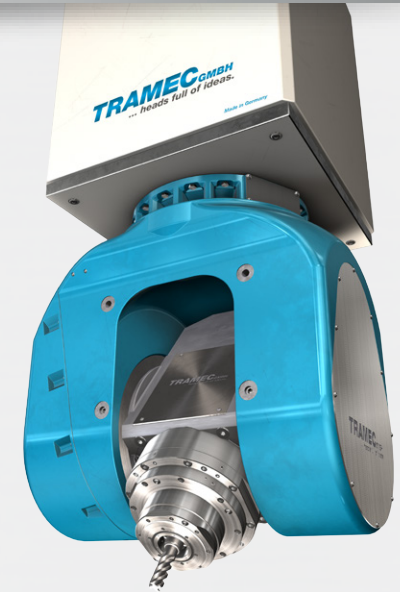

FORK

Housing in cast iron GGG50.

PLEASE NOTE!

I = depending on the interface to the Z axis
The spindle has to be supplied to TRAMEC GmbH free of charge for integration

TRAMEC GMBH
... heads full of ideas. www.tramec.net